



US011173991B1

(12) **United States Patent**
Livermore

(10) **Patent No.:** **US 11,173,991 B1**

(45) **Date of Patent:** **Nov. 16, 2021**

(54) **STABILIZER WITH AT LEAST ONE SHOCK
ABSORBER**

(71) Applicant: **Michael A Livermore**, Charlottesville,
VA (US)

(72) Inventor: **Michael A Livermore**, Charlottesville,
VA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

3,330,241 A	11/1967	Stephanou	
3,589,324 A	6/1971	Hoffman	
3,952,680 A *	4/1976	Griffin	B63B 39/06 114/123
4,102,287 A	7/1978	Ferris	
4,905,622 A *	3/1990	Silvia, Jr.	B63B 39/062 114/122
5,144,904 A	9/1992	Weldon	
5,263,434 A	11/1993	Mashburn	
6,659,032 B1	12/2003	Simon	
7,644,674 B1	1/2010	Goldston	
2020/0070936 A1	3/2020	Ward	

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **17/320,390**

(22) Filed: **May 14, 2021**

DE 29613752 U1 * 10/1996 B63B 39/062

* cited by examiner

(51) **Int. Cl.**

B63B 39/00 (2006.01)

B63B 39/02 (2006.01)

B63B 39/06 (2006.01)

E02B 3/06 (2006.01)

(52) **U.S. Cl.**

CPC B63B 39/02 (2013.01); B63B 39/062
(2013.01); E02B 3/064 (2013.01)

(58) **Field of Classification Search**

CPC B63B 39/005; B63B 39/02; B63B 39/06;
B63B 39/062; B63B 2039/067
See application file for complete search history.

Primary Examiner — Andrew Polay

(74) *Attorney, Agent, or Firm* — Glushko-Samuelson
Intellectual Property Law Clinic

(57)

ABSTRACT


A movable structure comprises a spar having a central portion, a first end portion, and a second end portion. A first tow line may connect between the first end portion of the spar and a first resistance device. A second tow line may connect between the second end portion of the spar and a second resistance device. A first shock absorber may connect between the spar and a first side of a movable structure. A second shock absorber may connect between the spar and a second side of a movable structure.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,561,539 A *	7/1951	Seward	B63B 39/062 114/126
3,260,232 A *	7/1966	Douglas	B63B 39/062 114/126

20 Claims, 4 Drawing Sheets

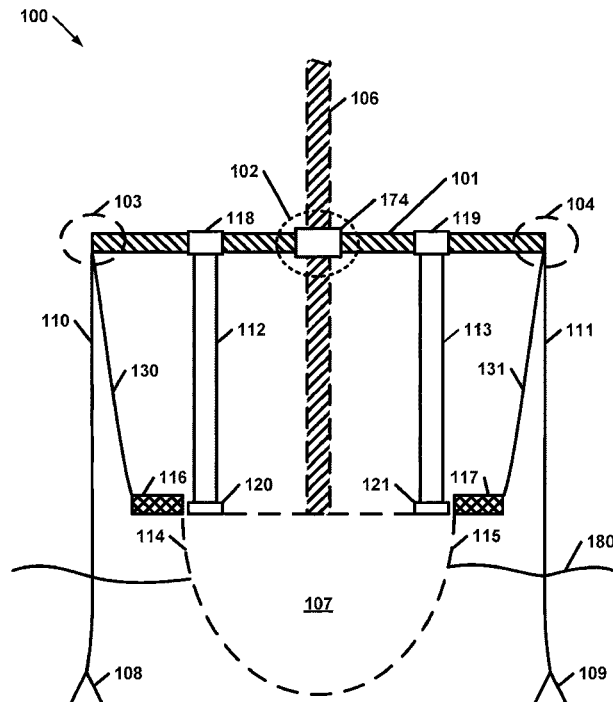

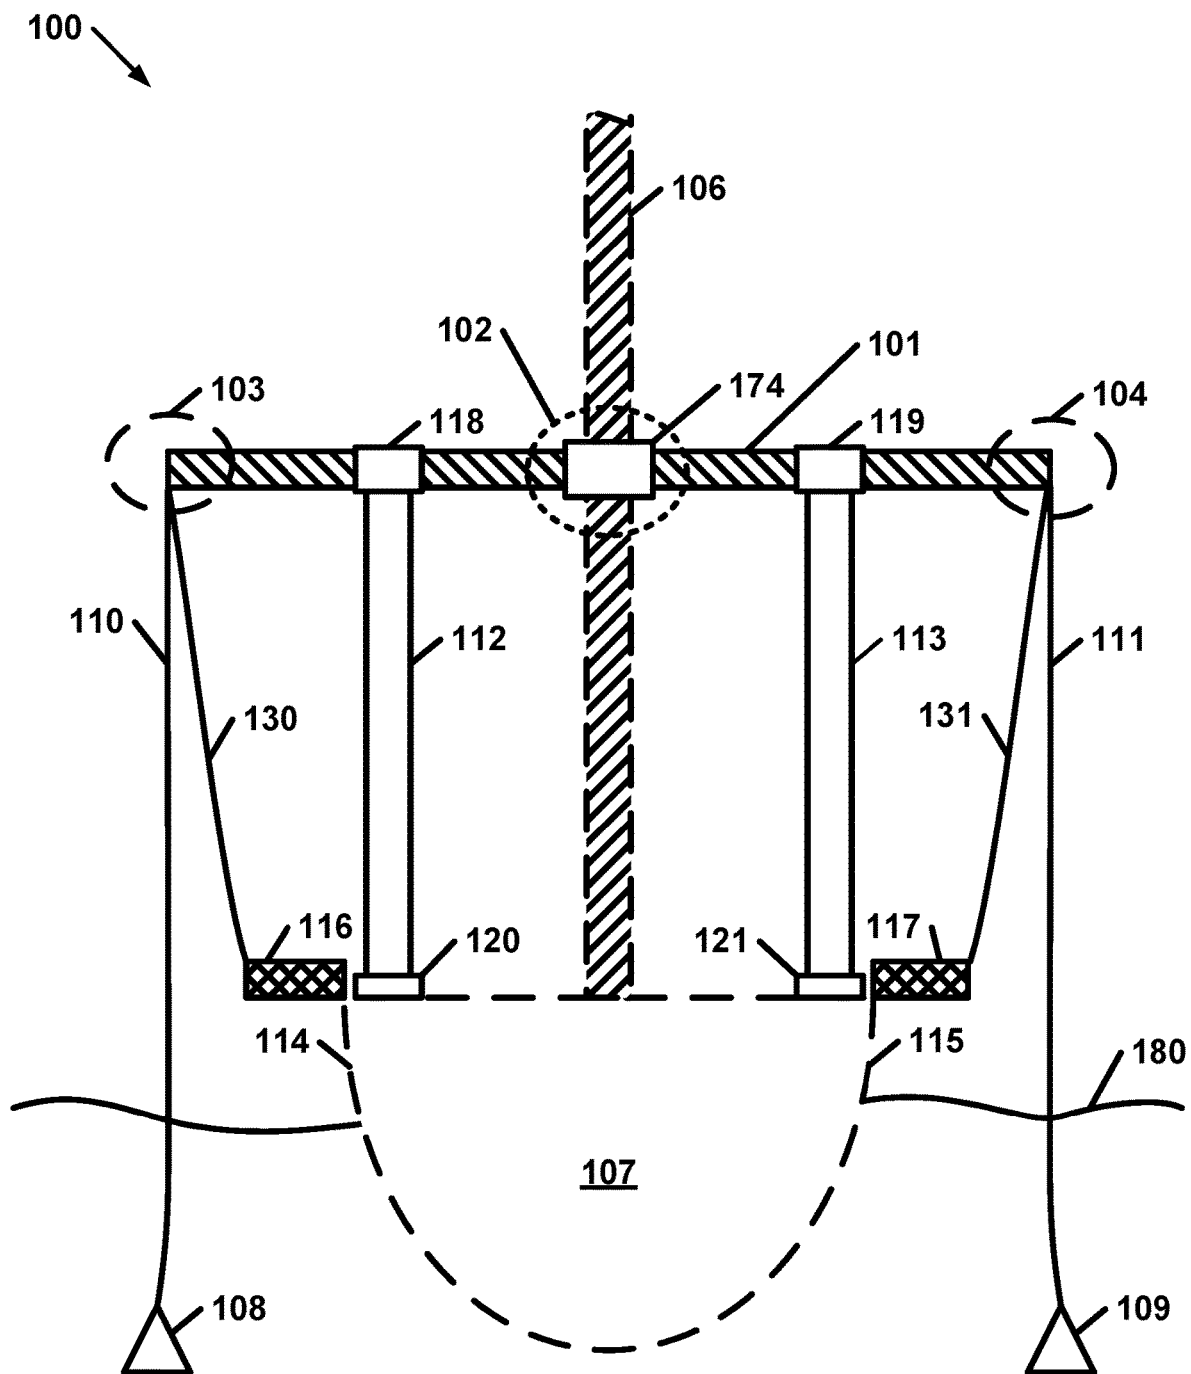


FIG. 1

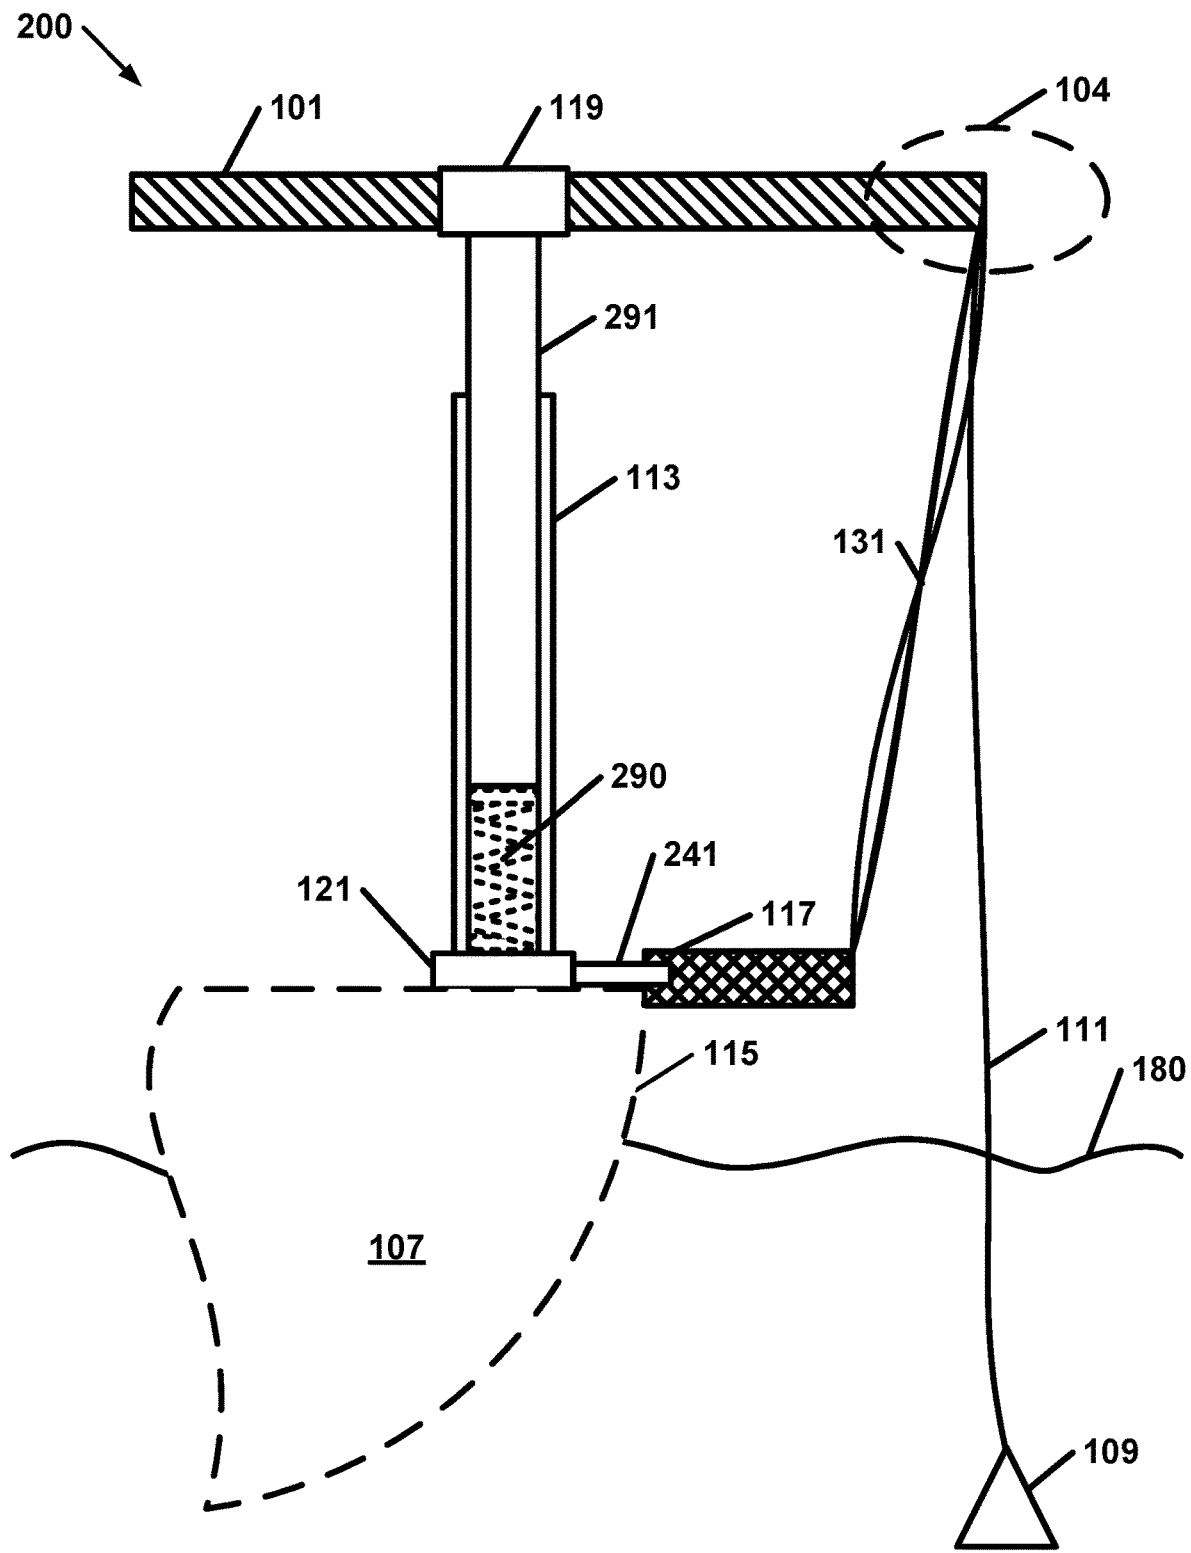


FIG. 2

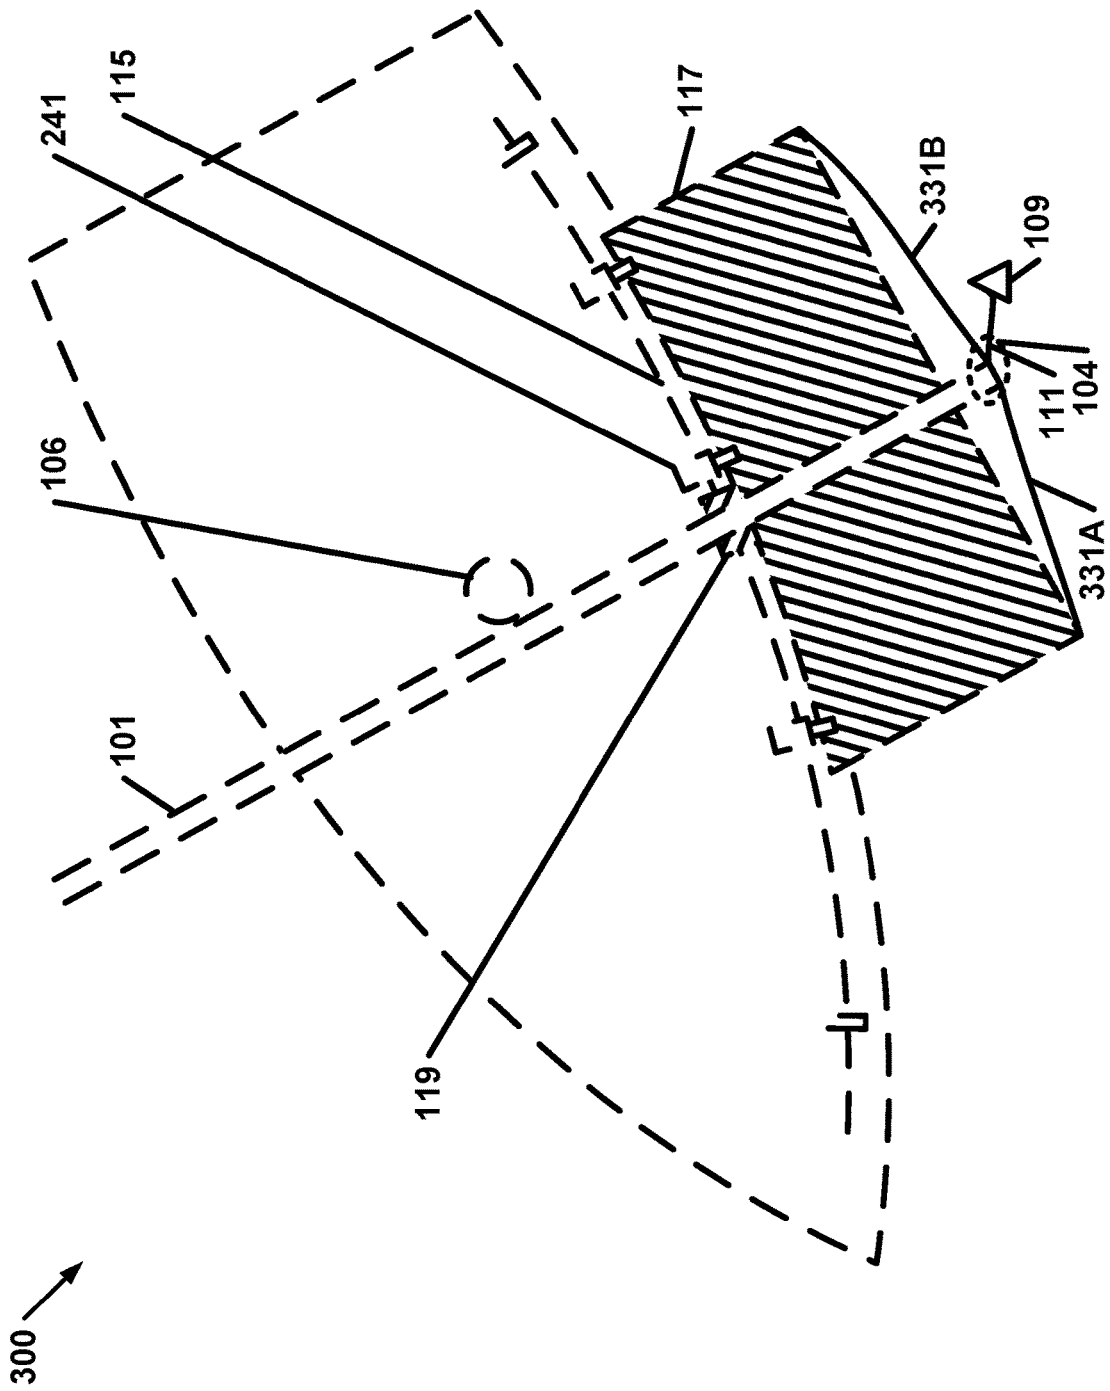


FIG. 3

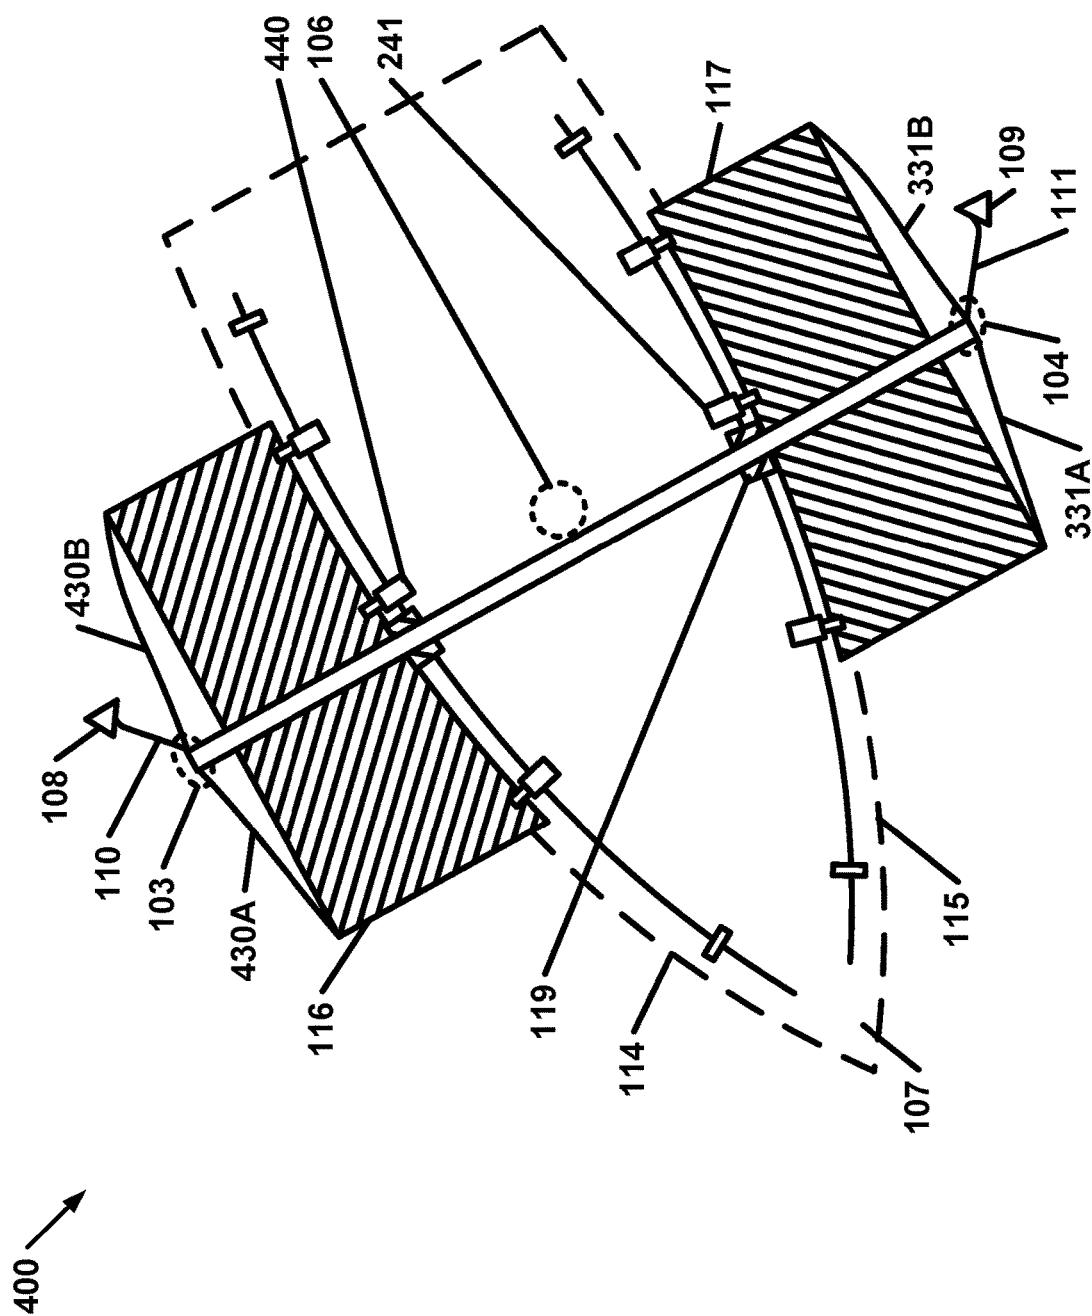


FIG. 4

1

STABILIZER WITH AT LEAST ONE SHOCK ABSORBER

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Non-limiting examples of embodiments of the disclosure are described below with reference to figures attached hereto that are listed following this paragraph. Similar structures, elements, or parts that appear in more than one figure are generally labeled with a similar numeral in other figures in which they appear. Dimensions of components and features shown in the figures are chosen for convenience and clarity of presentation and are not necessarily shown to scale.

FIG. 1 illustrates a front view of an aspect of an example embodiment of the present disclosure.

FIG. 2 illustrates a cross-sectional view of a shock absorber according to an aspect of an example embodiment of the present disclosure.

FIG. 3 illustrates a top view of an aspect of an example embodiment of the present disclosure.

FIG. 4 illustrates a top view of an aspect of an example embodiment of the present disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

The present disclosure relates generally to the field of stabilizing devices for various types of vessels and other movable objects. Specific embodiments related to monohull watercraft are disclosed to teach the basic concept of stabilizing devices. However, the concepts disclosed are broader and may be applied to various other movable objects such as multi-hull boats, canoes, pontoons, unmanned aerial vehicles, docks, towers, and/or the like.

Ocean swells can cause watercraft to roll. Some watercraft are designed to stabilize on their own, such as trimarans. Some watercraft have stabilizing devices installed. Some of the stabilizing devices utilize resistance devices that are attached to the watercraft in various ways. However, stabilizing devices can exert a considerable amount of strain on portions of the watercraft when counteracting ocean swell movements, which can cause significant damage to the watercraft.

In addition, some current stabilizing devices may encroach on the inherently limited deck space on many watercraft, including monohull boats.

Features herein relate to the considerable amount of strain stabilizing devices can exert on portions of a watercraft. In an example, a shock absorber may be incorporated in a stabilizing device. A shock absorber may reduce strain on a mast, or similar elongated portion, of a watercraft and redirect it to a side of a watercraft. This may reduce possible damage a stabilizing device can cause to a watercraft by transferring the strain to a more durable and stronger part of the watercraft.

In an example, a platform structure may be configured to one or more sides of a watercraft. This may increase deck space of a watercraft that utilizes the teachings of the present disclosure, while still counteracting ocean swells that may cause the watercraft to roll.

FIG. 1 illustrates a front view of an example apparatus 100 comprising a stabilizer on a movable structure (e.g. watercraft). At least one shock absorber (e.g. 112 and/or 113) may help at least one resistance device (e.g. 108 and/or 109) stabilize a watercraft or other movable structure (e.g. 107). The apparatus 100, as illustrated, comprises a spar 101 having a central portion 102, a first end portion 103, and a

2

second end portion 104. The apparatus 100 may comprise a first tow line 110 connected between the first end portion 103 of the spar 101 and a first resistance device 108. A second tow line 111 may be connected between the second end portion 104 of the spar 101 and a second resistance device 109. The apparatus 100 may comprise a first shock absorber 112 connected between the spar 101 and the first side 114 of the movable structure 107. The apparatus 100 may comprise a second shock absorber 113 connected between the spar 101 and the second side 115 of the movable structure 107.

According to an embodiment, a movable structure 107 may move due to an external force(s). The movable structure 107 may comprise, but is not limited to, a watercraft, a dock, a floating platform, a canoe, a pontoon, or similar apparatus that may be (or become) unstable due to water movements. The movable structure 107 may also comprise, but is not limited to, an aircraft, flying device, or similar apparatus that may be (or become) unstable due to air movement. The movable structure 107 may also comprise, but is not limited to, an apparatus that may be (or become) unstable due to another external force(s).

A movable structure 107 may comprise multiple parts. An embodiment of a movable structure 107 may comprise a first side 114 and a second side 115. The first side 114 and the second side 115 may be opposite portions of the movable structure 107. According to other embodiments, the first side 114 and the second side 115 may comprise different portions of a non-symmetric structure. According to other embodiments, the concepts introduced herein may be applied to movable structures with more than two sides.

A spar 101 may transfer the external force(s) to a first shock absorber 112 and/or a second shock absorber 113 attached to the movable structure 107. The spar 101 may be rigid enough to withstand an external force(s), but flexible enough to avoid fracturing. An external force could be applied by pressure from relative movement of water 180, air, and/or the like. According to an embodiment, the spar 101 may comprise a beam. According to an embodiment, the spar 101 may comprise a pole. According to an embodiment, the spar 101 may comprise a rod. According to an embodiment, the spar 101 may comprise wood. According to an embodiment, the spar 101 may comprise metal. According to an embodiment, the spar 101 may comprise a polymer material. According to an embodiment, the spar 101 may comprise carbon fiber. According to an embodiment, the spar 101 may comprise combinations of materials, such as, for example, at least two or more of: wood, metal, polymer material, carbon fiber, combinations thereof, and/or the like.

A spar 101 may comprise multiple portions. An embodiment of the spar 101 may comprise a central portion 102, a first end portion 103, and a second end portion 104. The central portion 102 may comprise a middle section of a continuous spar 101. The central portion 102 may also comprise a section where spar(s) 101 are connected. The first end portion 103 and the second end portion 104 may be opposite end portions of a continuous spar 101. The first end portion 103 and the second end portion 104 may comprise the end portions of multiple spars 101 opposite the central portion 102.

A first resistance device 108 and a second resistance device 109 may be substantially similar. Substantially similar means that the first resistance device 108 and/or the second resistance device 109 may appear identical and/or may be complimentary pieces with respect to shape, dimension, size, and/or material. Substantially similar may mean the first resistance device 108 and/or the second resistance device 109 may operate in a similar capacity within the

overall apparatus **100**. The first resistance device **108** and/or the second resistance device **109** may provide the counteracting force(s) to the external force(s) that cause the movable structure **107** to move. The first resistance device **108** and/or the second resistance device **109** may comprise paravanes, plated stabilizers, hinged-wing stabilizers, finned stabilizers, anchors, moorings, combinations thereof, or other stabilizer design(s). According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise plastic. According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise wood. According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise metal. According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise rubber. According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise a polymer material. According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise carbon fiber. According to an embodiment, the first resistance device **108** and/or the second resistance device **109** may comprise combinations of materials, such as, for example, at least two or more of: plastic, wood, metal, rubber, polymer material, carbon fiber, combinations thereof, and/or the like.

A first tow line **110** and a second tow line **111** may be substantially similar. Substantially similar means that the first tow line **110** and/or the second tow line **111** may appear identical and/or may be complimentary pieces with respect to shape, dimension, size, and/or material. Substantially similar may mean the first tow line **110** and/or the second tow line **111** may operate in a similar capacity within the overall apparatus **100**. The first tow line **110** may transfer the counteracting forces from the first resistance device **108** to the first end portion **103** of the spar **101**. The second tow line **111** may transfer the counteracting forces from the second resistance device **109** to the second end portion **104** of the spar **101**. The first tow line **110** may comprise a material configured to bear the counteracting forces from the first resistance device **108** without breaking or fraying. The second tow line **111** may comprise a material configured to bear the counteracting forces from the second resistance device **109** without breaking or fraying. According to an embodiment, the first tow line **110** and/or the second tow line **111** may comprise plastic. According to an embodiment, the first tow line **110** and/or the second tow line **111** may comprise rope. According to an embodiment, the first tow line **110** and/or the second tow line **111** may comprise metal. According to an embodiment, the first tow line **110** and/or the second tow line **111** may comprise nylon. According to an embodiment, the first tow line **110** and/or the second tow line **111** may comprise synthetic polymer. According to an embodiment, the first tow line **110** and/or the second tow line **111** may comprise combinations of materials, such as, for example, at least two or more of: plastic, rope, metal, nylon, synthetic polymer, combinations thereof, and/or the like.

A first shock absorber **112** and a second shock absorber **113** may be substantially similar. Substantially similar means that the first shock absorber **112** and/or the second shock absorber **113** may appear identical and/or may be complimentary pieces with respect to shape, dimension, size, and/or material. Substantially similar may mean the first shock absorber **112** and/or the second shock absorber **113** may operate in a similar capacity within the overall apparatus **100**. The first shock absorber **112** may transfer

counteracting forces exhibited from the first end portion **103** of the spar **101** to the first side **114** of the movable structure **107**. The second shock absorber **113** may transfer counteracting forces exhibited from the second end portion **104** of the spar **101** to the second side **115** of the movable structure **107**. The first shock absorber **112** and/or the second shock absorber **113** may comprise a material configured to bear the counteracting forces from the spar **101**.

According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise a multi-tube structure, for example a twin-tube structure. Twin-tube means that a shock absorber may comprise an outer tube and an inner tube. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise a mono-tube structure. Mono-tube means that a shock absorber may comprise one tube. A tube may comprise different cross-sectional shapes, such as, for example, a round cross-sectional shape, a rectangular cross-sectional shape, a triangular cross-sectional shape, or any similar cross-sectional shape.

FIG. 2 illustrates a cross-sectional view of a shock absorber according to an aspect of an example embodiment of the present disclosure. A piston **291**, or similar device, may increase and decrease the pressure of a chamber **290** within a shock absorber **113** in an apparatus **200**. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise hydraulics. Hydraulics may enable a shock absorber to use one or more fluids to absorb and/or dampen shock impulses. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise an internal spring. An internal spring may comprise at least one spring, coil, and/or similar device. An internal spring may be employed to absorb and/or dampen shock impulses. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise pneumatics. Pneumatics may enable a shock absorber to use one or more gases to absorb and/or dampen shock impulses. The first shock absorber **112** and/or the second shock absorber **113** may employ other devices to absorb and/or dampen shock impulses. For example, according to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise torsion bars. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise electromagnetic suspensions. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise air bag suspensions. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise one or more pistons. According to an embodiment, the first shock absorber **112** and/or the second shock absorber **113** may comprise combinations of devices that may absorb and/or dampen shock impulses, such as, for example: a twin-tube structure, a mono-tube structure, hydraulics, pneumatics, an internal spring, torsion bars, electromagnetic suspensions, air bag suspensions, one or more pistons, combinations thereof, and/or the like.

The movable structure **107** may comprise an elongated member **106**. According to an embodiment, the elongated member **106** may comprise a mast, or similar structure, that extends up from, through, or near, the deck of the watercraft. FIG. 3 illustrates a top view of an aspect of an example embodiment **300** of the present disclosure. According to an embodiment, the spar **101** may be perpendicular in relation to the elongated member **106**. The term perpendicular means the elongated member **106** and the spar **101** intersect at, or near, a right angle. For example, according to an embodi-

5

ment, the elongated member **106** and the spar **101** may intersect between -10 and $+10$ degrees. For example, according to an embodiment, the elongated member **106** and the spar **101** may intersect between -5 and $+12$ degrees. According to some embodiments, the spar **101** may be configured to be movable from a pure perpendicular position. This movement may be based on external effects such as sail positions, sail weight distributions, wind pressure, weight of objects attached to the spar **101**, structure of a connector that connects the spar **101** to the elongated member **106**, and/or the like.

According to an embodiment, the apparatus **100** may comprise a first platform **116** and/or a second platform **117**. The first platform **116** and the second platform **117** may be substantially similar. Substantially similar means that the first platform **116** and/or the second platform **117** may appear identical and/or may be complimentary with respect to shape, dimension, size, and/or material. Substantially similar may mean the first platform **116** and/or the second platform **117** may operate in a similar capacity within the overall apparatus **100**. The first platform **116** may connect to the first side **114** of the movable structure **107**. The first platform **116** may connect to the first end portion **103** of the spar **101** via a first stabilizing line(s) **130**. The second platform **117** may connect to the second side **115** of the movable structure **107**. The second platform **117** may connect to the second end portion **104** of the spar **101** via a second stabilizing line(s) **131**.

FIG. 4 illustrates a top view of an aspect of an example embodiment **400** of the present disclosure. According to an embodiment, a first platform **116** may connect to a stanchion **440**, or similar device, attached to the first side **114** of the movable structure **107**. According to an embodiment, a second platform **117** may connect to a stanchion **241**, or similar device, attached to the second side **115** of the movable structure **107**. A stanchion (e.g. **440** and/or **241**) may comprise a device configured to secure a platform (e.g. **116** and/or **117**) to a side (e.g. **114** and/or **115**) of a movable structure (e.g. **107**). According to an embodiment, a stanchion (e.g. **440** and/or **241**) may comprise a device configured to attach to the outer portion of the first side **114** of the movable structure **107** and/or the second side **115** of the movable structure **107**. According to an embodiment, a stanchion (e.g. **440** and/or **241**) may comprise a device configured to be attached to the gunwale, or similar edge, portion of the first side **114** of the movable structure **107** and/or the second side **115** of the movable structure **107**. According to an embodiment, a stanchion (e.g. **440** and/or **241**) may comprise a device configured to attach to the railing portion of the first side **114** of the movable structure **107** and/or the second side **115** of the movable structure **107**. According to an embodiment, a stanchion (e.g. **440** and/or **241**) may comprise a device configured to attach to the deck portion of the first side **114** of the movable structure **107** and/or the second side **115** of the movable structure **107**.

A first platform **116** may provide additional storage space for the first side **114** of the movable structure **107**. A second platform **117** may provide additional storage space for the second side **115** of the movable structure **107**. The first platform **116** may comprise a material configured to bear the weight of stored object(s) on the first side **114** of the movable structure **107**. The second platform **117** may comprise a material configured to bear the weight of stored object(s) on the second side **115** of the movable structure **107**. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise canvas. According to an embodiment, the first platform **116** and/or

6

the second platform **117** may comprise polymer material. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise plastic. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise fabric. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise metal. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise rubber. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise wood. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise carbon fiber. According to an embodiment, the first platform **116** and/or the second platform **117** may comprise combinations of materials, such as, for example, at least two or more of: canvas, polymer material, plastic, fabric, metal, rubber, wood, carbon fiber, combinations thereof, and/or the like.

According to an embodiment, the first stabilizing line(s) (e.g. **130**) may comprise a first line **430A**. According to an embodiment, the first stabilizing line(s) (e.g. **130**) may comprise a first line **430A** and a second line **430B**. According to an embodiment, the first stabilizing line(s) (e.g. **130**) may comprise more than two lines. According to an embodiment, the second stabilizing line(s) (e.g. **131**) may comprise a first line **331A**. According to an embodiment, the second stabilizing line(s) (e.g. **131**) may comprise a first line **331A** and a second line **331B**. According to an embodiment, the second stabilizing line(s) (e.g. **131**) may comprise more than two lines.

First stabilizing line(s) (e.g. **130**) may comprise a material configured to bear the weight of the first platform **116** without breaking or fraying. Second stabilizing line(s) (e.g. **131**) may comprise a material configured to bear the weight of the second platform **117** without breaking or fraying. According to an embodiment, the first stabilizing line(s) (e.g. **130**) and/or the second stabilizing line(s) (e.g. **131**) may comprise plastic. According to an embodiment, the first stabilizing line(s) (e.g. **130**) and/or the second stabilizing line(s) (e.g. **131**) may comprise rope. According to an embodiment, the first stabilizing line(s) (e.g. **130**) and/or the second stabilizing line(s) (e.g. **131**) may comprise metal. According to an embodiment, the first stabilizing line(s) (e.g. **130**) and/or the second stabilizing line(s) (e.g. **131**) may comprise nylon. According to an embodiment, the first stabilizing line(s) (e.g. **130**) and/or the second stabilizing line(s) (e.g. **131**) may comprise polymer material. According to an embodiment, the first stabilizing line(s) (e.g. **130**) and/or the second stabilizing line(s) (e.g. **131**) may comprise combinations of materials, such as, for example, at least two or more of: plastic, rope, metal, nylon, polymer material, combinations thereof, and/or the like.

According to an embodiment, the spar **101** may be long enough for the first end portion **103** to extend over the first side **114** of the movable structure **107**. According to an embodiment, the spar **101** may be long enough for the second end portion **104** to extend over the second side **115** of the movable structure **107**. According to an embodiment, the extent of the overhang may allow the first resistance device **108** and/or the second resistance device **109** to interact with the external force(s).

According to an embodiment, the apparatus **100** may comprise a brace **174**. The brace **174** may be attached to the elongated member **106** of the movable structure **107**. The brace **174** may connect to the central portion **102** of the spar **101**. The brace **174** may secure the spar **101** to the elongated member **106**, providing additional stability to the apparatus **100** in relation to the movable structure **107**. According to an

embodiment, the brace **174** may comprise metal. According to an embodiment, the brace **174** may comprise plastic. According to an embodiment, the brace **174** may comprise polymer material. According to an embodiment, the brace **174** may comprise rubber. According to an embodiment, the brace **174** may comprise wood. According to an embodiment, the brace **174** may comprise carbon fiber. According to an embodiment, the brace **174** may comprise combinations of materials, such as, for example, at least two or more of: metal, plastic, polymer material, rubber, wood, carbon fiber, combinations thereof, and/or the like.

According to an embodiment, the brace **174** may comprise stagnant components. Stagnant means that the brace **174** may comprise one or more components that are configured to avoid moving with spar **101** movements. According to an embodiment, the brace **174** may comprise movable components. Movable means that the brace **174** comprises one or more components that are configured to change position with the spar **101** movements.

According to an embodiment, the apparatus **100** may comprise a first attachment cuff **118** and/or a second attachment cuff **119**. The first attachment cuff **118** and the second attachment cuff **119** may be substantially similar. Substantially similar means that the first attachment cuff **118** and/or the second attachment cuff **119** may appear identical and/or may be complimentary with respect to shape, dimension, size, and/or material. Substantially similar may mean the first attachment cuff **118** and/or the second attachment cuff **119** may operate in a similar capacity within the overall apparatus **100**. The first attachment cuff **118** may attach between the first end portion **103** and the central portion **102** of the spar **101**. The first attachment cuff **118** may attach to the first shock absorber **112**. The second attachment cuff **119** may attach between the second end portion **104** and the central portion **102** of the spar **101**. The second attachment cuff **119** may attach to the second shock absorber **113**. The first attachment cuff **118** may secure the spar **101** to the first shock absorber **112**. The second attachment cuff **119** may secure the spar **101** to the second shock absorber **113**.

According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise metal. According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise plastic. According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise a polymer material. According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise rubber. According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise wood. According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise carbon fiber. According to an embodiment, the first attachment cuff **118** and/or the second attachment cuff **119** may comprise combinations of materials, such as, for example, at least two or more of: metal, plastic, polymer material, rubber, wood, carbon fiber, combinations thereof, and/or the like.

According to an embodiment, the apparatus **100** may comprise a first attachment pad **120** and/or a second attachment pad **121**. The first attachment pad **120** and the second attachment pad **121** may be substantially similar. Substantially similar means that the first attachment pad **120** and/or the second attachment pad **121** may appear identical and/or may be complimentary with respect to shape, dimension, size, and/or material. Substantially similar may mean the first attachment pad **120** and/or the second attachment pad **121** may operate in a similar capacity within the overall

apparatus **100**. The first attachment pad **120** may connect to the first shock absorber **112**. The first attachment pad **120** may connect to the first side **114** of the movable structure **107**. The second attachment pad **121** may connect to the second shock absorber **113**. The second attachment pad **121** may connect to the second side **115** of the movable structure **107**. The first attachment pad **120** may secure the first shock absorber **112** to the first side **114** of the movable structure **107**. The first attachment pad **120** may reduce an external force(s) from the first shock absorber **112** to the first side **114** of the movable structure **107**. The second attachment pad **121** may secure the second shock absorber **113** to the second side **115** of the movable structure **107**. The second attachment pad **121** may reduce an external force(s) from the second shock absorber **113** to the second side **115** of the movable structure **107**.

According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise metal. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise plastic. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise polymer material. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise rubber. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise wood. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise carbon fiber. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise fabric. According to an embodiment, the first attachment pad **120** and/or the second attachment pad **121** may comprise combinations of materials, such as, for example, at least two or more of: metal, plastic, polymer material, rubber, wood, carbon fiber, fabric, combinations thereof, and/or the like.

In the figures, certain elements (e.g. movable structure **107**, and elongated member **106**) in this disclosure are shown in dashes. These dashed elements (e.g. movable structure **107**, and elongated member **106**) are shown for illustrative purposes to show how claimed elements of the embodiments of this disclosure may be configured to connect to these dashed elements. Additional embodiments may include one or more of the dashed elements. Elements with identical numbers in the figures are shown to represent similar structures between the embodiments. However, each figure in the disclosure may represent a separate embodiment.

In this disclosure, “a” and “an” and similar phrases are to be interpreted as “at least one” or “one or more.” Similarly, any term that ends with the suffix “(s)” is to be interpreted as “at least one” or “one or more.” In this disclosure, the term “may” is to be interpreted as “may, for example.” In other words, the term “may” is indicative that the phrase following the term “may” is an example of one of a multitude of suitable possibilities that may, or may not, be employed to one or more of the various embodiments. The phrase “based on” is indicative that the phrase following the term “based on” is an example of one of a multitude of suitable possibilities that may, or may not, be employed to one or more of the various embodiments. The phrase “in response to” is indicative that the phrase following the phrase “in response to” is an example of one of a multitude of suitable possibilities that may, or may not, be employed to one or more of the various embodiments. The terms “including” and “comprising” should be interpreted as meaning “including, but not limited to.” In this disclosure,

the abbreviation “e.g.” means “for example” and is followed by one or more examples that illustrate a term receding the abbreviation.

In this disclosure, various embodiments are disclosed. Limitations, features, and/or elements from the disclosed example embodiments may be combined to create further embodiments within the scope of the disclosure.

Furthermore, many features presented above are described as being optional through the use of “may” or the use of parentheses. For the sake of brevity and legibility, the present disclosure does not explicitly recite each and every permutation that may be obtained by choosing from the set of optional features. However, the present disclosure is to be interpreted as explicitly disclosing all such permutations. For example, a system described as having three optional features may be embodied in seven different ways, namely with just one of the three possible features, with any two of the three possible features or with all three of the three possible features.

The disclosure of this patent document incorporates material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, for the limited purposes required by law, but otherwise reserves all copyright rights whatsoever.

While various embodiments have been described above, it should be understood that they have been presented by way of example, and not limitation. It will be apparent to persons skilled in the relevant art(s) that various changes in form and detail can be made therein without departing from the scope. In fact, after reading the above description, it will be apparent to one skilled in the relevant art(s) how to implement alternative embodiments. Thus, the present embodiments should not be limited by any of the above-described exemplary embodiments. In particular, it should be noted that, for example purposes, the above explanation has focused on stabilizing rolling effects on a watercraft. However, one skilled in the art will recognize that embodiments of the invention may also be able to reduce the effects of rolling on different structures such as, for example, the rolling effects on a floating platform, unmanned aerial vehicles, combinations thereof, and/or the like.

In addition, it should be understood that any figures which highlight the functionality and advantages, are presented for example purposes only. The disclosed architecture is sufficiently flexible and configurable, such that it may be utilized in ways other than that shown. For example, the actions listed in any flowchart may be re-ordered or only optionally used in some embodiments.

Further, the purpose of the Abstract of the Disclosure is to enable the U.S. Patent and Trademark Office and the public generally, and especially the scientists, engineers and practitioners in the art who are not familiar with patent or legal terms or phraseology, to determine quickly from a cursory inspection the nature and essence of the technical disclosure of the application. The Abstract of the Disclosure is not intended to be limiting as to the scope in any way.

Finally, it is the applicant's intent that only claims that include the express language “means for” or “step for” be interpreted under 35 U.S.C. 112. Claims that do not expressly include the phrase “means for” or “step for” are not to be interpreted under 35 U.S.C. 112.

What is claimed is:

1. An apparatus comprising:
 - a) a spar comprising:
 - i) a central portion;

- ii) a first end portion;
 - iii) a second end portion;
 - b) a first resistance device;
 - c) a second resistance device;
 - d) a first tow line connected between:
 - i) the first end portion; and
 - ii) the first resistance device;
 - e) a second tow line connected between:
 - i) the second end portion; and
 - ii) the second resistance device;
 - f) a first shock absorber configured to connect:
 - i) between the first end portion and the central portion; and
 - ii) a first side of a movable structure; and
 - g) a second shock absorber configured to connect:
 - i) between the second end portion and the central portion; and
 - ii) a second side of the movable structure.
2. The apparatus set forth in claim 1, further comprising an elongated member.
 3. The apparatus set forth in claim 1, further comprising a first platform configured to connect to:
 - a) the first side of the movable structure; and
 - b) the first end portion via first stabilizing lines.
 4. The apparatus set forth in claim 2, further comprising a second platform configured to connect to:
 - a) the second side of the movable structure; and
 - b) the second end portion via second stabilizing lines.
 5. The apparatus set forth in claim 1, wherein the spar comprises a continuous beam.
 6. The apparatus set forth in claim 1, wherein the spar comprises multiple beams.
 7. The apparatus set forth in claim 2, wherein the spar is positioned perpendicular to the elongated member.
 8. The apparatus set forth in claim 2, further comprising a brace configured to attach to:
 - a) the elongated member of the movable structure; and
 - b) the central portion.
 9. The apparatus set forth in claim 8, wherein the brace comprises stagnant components.
 10. The apparatus set forth in claim 8, wherein the brace comprises movable components.
 11. The apparatus set forth in claim 1, wherein the first shock absorber comprises an internal spring.
 12. The apparatus set forth in claim 1, wherein the first shock absorber comprises hydraulics.
 13. The apparatus set forth in claim 1, wherein the first shock absorber comprises pneumatics.
 14. The apparatus set forth in claim 1, wherein the second shock absorber comprises an internal spring.
 15. The apparatus set forth in claim 1, wherein the second shock absorber comprises hydraulics.
 16. The apparatus set forth in claim 1, wherein the second shock absorber comprises pneumatics.
 17. The apparatus set forth in claim 1, wherein the first shock absorber is connected between:
 - a) the first end portion; and
 - b) the central portion via a first attachment cuff.
 18. The apparatus set forth in claim 17, wherein the second shock absorber is connected between:
 - a) the second end portion; and
 - b) the central portion via a second attachment cuff.
 19. The apparatus set forth in claim 1, wherein the first shock absorber is configured to connect to the first side of the movable structure via a first attachment pad.

11

20. The apparatus set forth in claim **19**, wherein the second shock absorber is configured to connect to the second side of the movable structure via a second attachment pad.

* * * * *

12